

Product Catalog



Edition
January
2014



Table of contents

Oral surgery & Implantology

Elcomed	4 – 7
Implantmed.	8 – 9
Parts available after sale for Elcomed and Implantmed.	10 – 14
Parts available after sale for Elcomed SA-200.	15
Piezomed	16 – 17
Parts available after sale and Accessories for Piezomed.	18 – 27
Prosthetic screwdriver	28 – 31
Surgical contra-angle and straight handpiece with and without mini LED+	32
Surgical contra-angle handpiece	33
Implantology contra-angle.	34
Parts available after sale for surgical contra-angle handpiece	35
Surgical straight handpiece	36 – 39
Surgical saw handpieces	40 – 41
Surgical saw blades	42 – 43
IDC – Implantology Distance Control	44 – 47
Surgical suction unit.	48 – 49

Intraosseous injection

Anesto	50 – 53
--------------	---------







Hygiene & maintenance

Service Oil F1	54 – 59
----------------------	---------

Dental laboratory

Perfecta 300 / 600	60 – 63
Perfecta 900	64 – 65
Accessories for Perfecta 300 / 600 / 900	66 – 67
Technical handpiece 945	68


Explanation of symbols

- | | |
|---|--|
|  with LED+ light |  with LED light |
|  with light | |
|  without light | |
|  integrated spray | |
|  external spray | |
|  without spray | |
|  thermo washer disinfected | |
|  sterilizable | |
|  disposable article | |

Important information

- > Pictures are for illustrative purposes only. Additional equipment and accessories are not included with the item
- > KaVo Multiflex® is a registered trade mark of Kaltenbach & Voigt GmbH, Germany
- > NSK Mach® and NSK QD-J® is a registered trade mark of NSK NAKANASHI INC., Japan
- > BienAir Unifix® is a registered trade mark of Bien-Air Dental SA, Bienne
- > Sirona® is a registered trade mark of Sirona Dental Systems GmbH, Bensheim

Elcomed

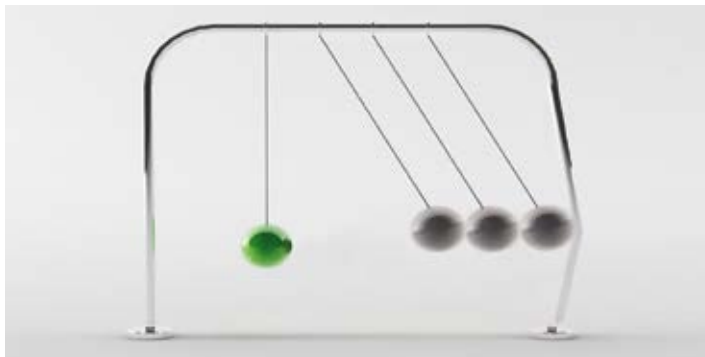

In addition to the expert knowledge of the surgeon, the drive unit is also a pivotal factor in the success of a surgical procedure. The Elcomed is a high-quality innovative solution for maxillofacial surgery, implantology, microsurgery and small bone surgery.

- > Just one operating stage for setting all necessary parameters
- > Complete documentation via USB stick
- > Shortest and lightest 50,000 rpm motor
- > Up to 80 Ncm on the rotary instrument
- > 6 individually adjustable program locations
- > Automatic thread cutter function

Elcomed



complete with

- > Control unit with or without documentation (220 – 240 V or 100 – 130 V)
- > Variable foot control S-N1
- > Motor with 1.8 or 3.5 m cable and clips
- > Irrigation tubing set
- > Mains cable
- > Motor support
- > Stand
- > Locking pins
- > Additional equipment for control unit with documentation: USB Stick

with documentation

SA-310, motor with 1.8 m cable
REF 15933100

SA-310, motor with 3.5 m cable
REF 15933101


without documentation

SA-310, motor with 1.8 m cable
REF 15933102

SA-310, motor with 3.5 m cable
REF 15933103

Parts available after sale for Elcomed

Notes




 motor

1.8 m cable with 5 clips

REF 05513400


3.5 m cable with 10 clips

REF 06205800



USB stick

REF 06290700



fuse

250 V – T1.6AH

REF 06352200

Implantmed



The new W&H Implantmed offers the implantologist a drive unit for daily use. This surgical unit can be safely used for oral-surgery procedures in implantology and maxillo-facial surgery.

- > Easy to use: large, easy-to-read display
- > Short lightweight motor: fatigue-free operation
- > Wide speed range: 300 – 40,000 rpm on the motor
- > Accurate torque control, 5 – 70 Ncm
- > Automatic thread cutter function
- > Motor and cable can be thermo washer disinfected and sterilized

Implantmed






complete with

- > Control unit (230 V or 115 V)
- > Motor with 1.8 m cable
- > Including 5 clips
- > Foot control S-N1
- > Stand
- > Motor support
- > Mains cable
- > Including 2 locking pins and 3 disposable irrigation tubings


SI-915 (115 V)
REF 16929001
SI-923 (230 V)
REF 16929000

Parts available after sale for Implantmed



  motor with 1.8 m cable
incl. 5 clips

REF 06631600



fuse

1.25 A slow blow
REF 04014700

Parts available after sale for Elcomed and Implantmed



variable foot control
(Elcomed SA-310,
Implantmed SI-915, SI-923)

S-N1
REF 06202400



handle
for foot control SN-1

REF 04653500



  stand


REF
04005900




  locking pin for motor

REF 04006800


Parts available after sale for Elcomed and Implantmed




 disposable irrigation tubing


2.2 m with Luer-Lock,
for motor with 1.8 m cable
10 pcs
REF 00929300

3.8 m with Luer-Lock,
for motor with 3.5 m cable
10 pcs
REF 00929400



 motor / handpiece support
(Elcomed SA-310,
Implantmed SI-915, SI-923)

REF 06177800



 disposable irrigation tubing set


6 pcs, 2.2 m, for motor with 1.8 m cable
REF 04363600
6 pcs, 3.8 m, for motor with 3.5 m cable
REF 04364100




 clips


5 pcs for Elcomed SA-310
REF 06290600
5 pcs for Implantmed SI-923 / SI-915
REF 04019000


Parts available after sale for Elcomed and Implantmed




 Pump tubing 85 mm


3 pcs
REF 04014000




 irrigation spike w. clamp

REF 06338400



 pump tubing with nipple

REF 04013900



 roller clamp

REF 08338600

Parts available after sale for Elcomed and Implantmed



 sterilization cassette

REF 04013500



transportation case

REF 04013600



treatment trolley

steel coated, without sockets
REF 04541900


Parts available after sale for Elcomed SA-200




 clips

10 pcs

REF 02801000



 pump tubing with nipple
190 mm


1 pcs


REF 04035100

replacement pump tubing
190 mm

3 pcs

REF 04035200



 disposable irrigation tubing set

6 set per carton, for motor with 1.8 m cable

REF 04365300

6 set per carton, for motor with 3.5 m cable

REF 04365100

Piezomed



Piezomed facilitates the surgeon's work: thanks to innovative ultrasound technology, only bone substance is resected with high precision. The surrounding soft tissue remains uninjured. A noticeable relief for the patient: less pain, quicker healing!

- > Automatic instrument detection
- > Innovative LED ring
- > Extremely powerful and fast
- > Excellent cutting precision
- > Efficient cooling
- > Perfect cleaning

Piezomed



complete with

- > Control unit (100 – 130 V / 220 – 240 V)
- > Foot control SN-1
- > Handpiece with 1.8 m cable or
Handpiece with 3.5 m cable and clips
- > Irrigation tubing set
- > Mains cable
- > Motor support
- > Stand
- > Instrument changer
- > Sterilization cassette
- > Instrument set »Bone«

SA-320, motor with 1.8 m cable



REF 30078000

SA-320, motor with 3.5 m cable

REF 30078001

Parts available after sale for Piezomed



  handpiece

1.8 m cable incl. 5 clips
REF 06985000
 3.5 m cable incl. 10 clips
REF 07159200




foot control S-N1
REF 07004400

Handle for foot control S-N1
REF 04653500



  LED-Socket

REF 06205600



  motor support

REF 06177800

Parts available after sale for Piezomed




  clips


5 pcs
REF 06290600




  stand

REF 04005900



 disposable irrigation tubing set

6 pcs, 2.2 m
REF 04363600
 6 pcs, 3.8 m
REF 04364100





  irrigation tubing set
sterilizable

2.2 m
REF 04719400


Parts available after sale for Piezomed

Notes



  nozzle cleaner

REF 00636901



fuse T1,25AH

REF 06661800



  sterilization cassette

REF 07172900



transportation case

REF 04013600



Accessories for Piezomed

Accessories for Piezomed





  Instrument changer

REF 06276700



  Instrument changer

REF 06276700

  Instrument set »Endo«
consists of instruments:

R1D, R2RD, R2LD, R3D, R4RD, R4LD



REF 07173300

  Instrument set »Paro«
consists of instruments:

P1, P2RD, P2LD



REF 07173400



  Instrument set »Bone«
consists of instruments:



B1, B2R, B2L, B3, B4, B5

REF 07173100

  Instrument set »Sinus«
consists of instruments:

S1, S2, S3, S4, S5

REF 07173200

  Instrument set »EX«
consists of instruments:

EX1, EX2

REF 07173500

W&H adaptor kit for cleaning tips in thermo washer disinfectors see page 160

Accessories for Piezomed



Instrument B1
Saw for bone cutting.

REF 05530100



Instrument B2R
Saw for bone cutting.

REF 06958600



Instrument B2L
Saw for bone cutting.

REF 05544400



Instrument B3
Instrument for bone collecting and bone modelling.

REF 05542100



Instrument B4
Instrument for bone splitting and bone cutting.

REF 05543800



Instrument B5
Instrument for bone collecting and bone modelling.

REF 05534500



Instrument B6
Saw for bone cutting and to cut dental hard tissue.

REF 07022500



Instrument B7
Saw for bone cutting and to cut dental hard tissue.

REF 07022600



Instrument S1
Diamond coated instrument for preparation of bone and for crown elongation.

REF 05542900



Instrument S2
Diamond coated instrument for preparation of bone and for crown elongation.

REF 05534700



Instrument S3
Instrument with 3 boreholes at the bottom side for conservative removal of sinus floor membrane.

REF 05508200



Instrument S4
Instrument for conservative removal of sinus floor membrane.

REF 05542300

Accessories for Piezomed



Instrument S5
Instrument for conservative removal of sinus floor membrane.

REF 05542800



Instrument R1D
Diamond coated thin instrument for retrograde root canal treatment.

REF 05975200



Instrument R2RD
Diamond coated thin instrument for retrograde root canal treatment.

REF 05991000



Instrument R2LD
Diamond coated thin instrument for retrograde root canal treatment.

REF 05999400



Instrument R3D
Diamond coated thin instrument for retrograde root canal treatment.

REF 05998800



Instrument R4RD
Diamond coated thin instrument for retrograde root canal treatment.

REF 06005000



Instrument R4LD
Diamond coated thin instrument for retrograde root canal treatment.

REF 06004700



Instrument P1
Instrument for removal of subgingival deposits, particularly suitable for deep periodontal pockets.

REF 06067700



Instrument P2RD
Right angled Perio instrument with diamond coating. Recommended for maintenance of moderate and deep pockets and furcations.

REF 06061700



Instrument P2LD
Left angled Perio instrument with diamond coating. Recommended for maintenance of moderate and deep pockets and furcations.

REF 06061800



Instrument EX1
Instrument for cutting the periodontal tissue for conservative hard tissue extraction.

REF 06069300



Instrument EX2
Instrument for cutting the periodontal tissue for conservative hard tissue extraction.

REF 06071100

Prosthetic screwdriver



The cordless prosthetic screwdriver has precise torque control. This enables precise, risk-free tightening of retaining screws. Using the prosthetic screwdriver also reduces the number of ratchet systems. Only mechanical rotary instruments are required.

- > Precise torque control from 8 – 40 Ncm
- > Automatic switch-off when desired torque level is reached
- > Constant speed saves time
- > Cordless operation
- > Good visibility
- > Reduction in ratchet systems

 thermo washer disinfectable

 135°C
sterilizable

Prosthetic screwdriver




Prosthetic screwdriver set, consists of:

- > Handpiece drive with key pad
- > Contra-angle handpiece with hexagon chucking system
- > Charging station
- > Rechargeable battery Li-Ion
- > Mains cable

IA-400


REF 16934000

Parts available after sale




handpiece drive
speed on the instrument 25 rpm,
torque 8 – 40 Ncm,
rechargeable battery type Li-Ion

IA-40 H
REF 16834000




rechargeable battery
Li-Ion 3.7 V, 680 mAh

REF 05451300



  key pad
REF 05937000



  contra-angle handpiece 80:1
W&H coupling system,
for rotary instruments with shaft
diameter 2.35 mm

IA-80
REF 16338001

Parts available after sale



charging station IA-400
mains voltage 100 – 240 V (+/- 10 %),
frequency 50 – 60 Hz

REF 05338301

Surgical contra-angle and straight handpieces with and without mini LED+



Contra-angle and straight handpieces with and without mini LED+
W&H surgical contra-angle and straight handpiece have been specially designed for the oral and maxillofacial surgery and implantology. The high-quality stainless steel with special coating makes them particularly robust.

- > Fatigue-free working thanks to optimal ergonomics
- > Durable and robust due to high-quality stainless steel and scratchresistant coating (except WI-75 E/KM)
- > Dismantlable for thorough cleaning (except WI-75 E/KM)
- > Wide range for all surgical applications
- > Coupling system ISO 3964 (DIN 13.940)


Contra-angle and straight handpieces with mini LED+

- > Work with daylight quality
- > Natural reproduction of red tones
- > Independent power supply with integrated generator
- > Longer life compared to conventional halogen bulbs

 with LED+ light

 without light

 external spray

 thermo washer
disinfectable

 sterilizable

Surgical contra-angle handpieces



2:0.1, hexagon chucking system, press-button chuck system, for surgical burs and cutters with contra-angled shank \varnothing 2.35 mm (shank hardness >50 HRC, >520 HV), Kirschner/Meyer internal cooling system

WS-75 L G
REF 30032000
WS-75
REF 30065000



1:1, press-button chuck system, for surgical burs and cutters with contra-angled shank \varnothing 2.35 mm

WS-56 L G
REF 30039000
WS-56
REF 30038000



1:2.7, 45° head, triple spray, press-button chuck system, for surgical burs and cutters with FG shank \varnothing 1.6 mm

WS-91 L G
REF 30048000
WS-91
REF 30047000




1:2.7, triple spray, press-button chuck system, for surgical burs and cutters with FG shank \varnothing 1.6 mm

WS-92 L G
REF 30042000
WS-92
REF 30041000

Implantology contra-angle handpiece




20:1, hexagon chucking system, press-button chuck system, for surgical burs and cutters with contra-angled shank \varnothing 2.35 mm (shank hardness >50 HRC, >520 HV), Kirschner/Meyer internal cooling system

 WI-75 E/KM (not dismantlable)
REF 10207550


Parts available after sale for implantology contra-angle handpiece



 spray clip black with external tube holder for Kirschner/Meyer internal cooling system

3 pcs
REF 04757100



 spray clip black without external tube holder


3 pcs
REF 05051000

Parts after sale for surgical contra-angle handpieces




spray clip green with external tube holder for Kirschner/Meyer internal cooling system

3 pcs, for left
REF 06946300
3 pcs, for right
REF 06948300



coolant tubing for internal cooling through the bur

REF 02610500



short nozzle cleaner

REF 02015101



spray clip green without external tube holder

3 pcs, for left
REF 06948400
3 pcs, for right
REF 06949500



Y-manifold

3 pcs
REF 06016400

Surgical straight handpieces



1:1, straight,
lever chuck system,
for surgical burs and cutters Ø 2.35 mm
(also system Stryker)

led+ S-11 LG
REF 30057000
S-11
REF 30056000



1:1, straight,
lever chuck system,
for surgical burs and cutters Ø 2.35 mm
(also system Stryker)

S-15
REF 30060000

Surgical straight handpieces



1:1, angled, slim,
lever chuck system,
for surgical burs and cutters Ø 2.35 mm
(also system Stryker)

led+ S-9 LG
REF 30054000
S-9
REF 30053000



1:2, angled, slim,
lever chuck system, for surgical burs
and cutters Ø 2.35 mm

S-12
REF 30061000



1:1, angled, slim,
lever chuck system, for surgical burs
and cutters Ø 2.35 mm

S-10
REF 30059000

Parts after sale for surgical straight handpieces


Notes



 coolant tube,
movable

for S-9, S-9 L G, S-11, S-11 L G
REF 06879500



 long nozzle cleaner

REF 00636901



 coolant tube,
movable

for S-10, S-12
REF 06903200



 coolant tube,
movable

for S-15
REF 07226900

W&H adaptor kit for cleaning tips
in thermo washer disinfectors see
page 160

Surgical saw handpieces



Saw handpieces

The saw handpieces have been specially designed for conversion osteotomies and bone harvesting. Even after many years of use at maximum speed, consistently high cutting performance is still guaranteed.

- > Durable and robust due to high-quality stainless steel and scratchresistant coating
- > Low vibration and exceptionally quiet
- > For sagittal, oscillating or reciprocal movement
- > Range of saw blades for all surgical applications
- > Innovative saw-blade shape for outstanding cutting performance
- > Dismantlable for thorough cleaning


 reciprocating

 oscillating

 sagittal

 without light


 external spray

 thermo washer disinfectable

 sterilizable


Surgical saw handpieces



 3.25:1,
with 2 reciprocating saw blades
each, R-15, R-20 and R-30


 S-8 R reciprocating
REF 10100801



 3.4:1,
with 2 oscillating saw blades each,
O-8 and O-15

 S-8 O oscillating
REF 10100802




 3.25:1,
with 2 sagittal saw blades each,
S-6 and S-10

 S-8 S sagittal
REF 10100803

Part available after sale




 spanner to change the saw blades

REF 04740200

Saw blades



 reciprocating, crosswise, forward/reverse cutting direction, for saw handpiece S-8 R

R-15, length approx. 15 mm

1 pc REF 04726000
5 pcs REF 04800100


R-20, length approx. 20 mm

1 pc REF 04725900
5 pcs REF 04800000

R-30, length approx. 30 mm

1 pc REF 04725700
5 pcs REF 04799900



 oscillating, cutting direction 90° to the axis, depth gauge on the saw blade (2.5 mm gradations), for saw handpiece S-8 O

O-8, width approx. 8 mm


REF 04800500

O-15, width approx. 15 mm

REF 04800400

Saw blades



 sagittal, cutting direction parallel to the axis, depth gauge on the saw blade (2.5 mm gradations), for saw handpiece S-8 S

S-6, width approx. 6 mm

1 pc REF 04726200
5 pcs REF 04800300

S-10, width approx. 10 mm

1 pc REF 04726100
5 pcs REF 04800200

IDC – Implantology Distance Control



Finding the correct distance is an important pre-requisite for a successful implantation.

IDC is a set of distance gauges, which – irrespective of implant diameter – ensures compliance with the correct »biological width« between the tooth and the implant as well as between two implants, independently from the diameter of the implant.

IDC can be used with the innovative surgical contra-angle handpieces WI-75 E/KM, WI-75 LED G, WS-75 E/KM and WS-75 LED G and is impressive due to its wealth of possible uses.

- > Simple – logical preparation steps
- > Safe – precise holes
- > Quick – »detours« via templates etc. unnecessary
- > Economical – cost-effective due to a wealth of possibilities for use

 thermo washer disinfectable

 135°C sterilizable

IDC – Implantology Distance Control



- set, consists of:
- > Distance gauge
 - > Center drill Ø 2 mm
 - > Distance sleeves A – C
 - > Distance sleeves 1 – 9

REF 05001600



  distance sleeves

A, distance 3.8 mm
REF 04830500

B, distance 4.3 mm
REF 04830600

C, distance 5.1 mm
REF 04867900



  distance gauge

REF 04825100



  center drill Ø 2 mm

REF 04726400



  distance sleeves

1, distance 6.1 mm
REF 04824900

2, distance 6.6 mm
REF 04825000

3, distance 7.1 mm
REF 04830100

4, distance 7.6 mm
REF 04830200



  distance sleeves

5, distance 8.0 mm
REF 04830300

6, distance 8.6 mm
REF 04830400

7, distance 9.1 mm
REF 04903700

8, distance 9.6 mm
REF 04929500

9, distance 11.5 mm
REF 04929600

Surgical suction unit



Blood, saliva and saline solution as well as particles of bone and surrounding tissue may cause blockages in your suction system. The suction system of your dental unit is in constant use throughout oral surgical and implantological interventions.

Its failure-free operation is imperative for uninterrupted and successful treatment. This is guaranteed by the SI-1500 suction unit. It retains the extracted material and, in doing so, effectively safeguards the pump filter of your dental unit against blockages.


- > No clogging of the filter in the vacuum pump
- > No contamination
- > Suitable for connections of Ø 11 and 16 mm suction hoses
- > Ergonomic disposable suction handpiece
- > Connection of bone filter possible
- > Easy to clean

 thermo washer disinfectable

 sterilizable

 disposable article

Surgical suction unit




complete with container,
cap with gasket, container base,
6 pcs sterile disposable suction
tubings with suction handpiece

SI-1500
REF 05276400



  container

1500 ml
REF 05150200



  cover

REF 05151700



  O-ring

REF 04597000



 sterile disposable

6 pcs
REF 05354500

Anesto



Intraosseous injection

Anesto, W&H's new anaesthesia system, was especially designed for intraosseous injection. Because the anaesthetic is injected directly into the jawbone, Anesto allows targeted and safe local anaesthetization of individual teeth without long-lasting numbness.

The benefits of Anesto


- > Safe
- > Thin & ergonomic
- > Durable
- > Simple to operate

The benefits of intraosseous anaesthetic:

- > Safe, gentle, fast
- > Improved time management through immediate effectiveness (max. 1 minute)
- > Immediate pain relief
- > Less anaesthetic required
- > No long-lasting anaesthetic required

 thermo washer disinfectable

 135°C sterilizable

 disposable article


Anesto




Anesto handpiece set, consists of:


2 pcs. needle clamping devices, needle changer, 2 pcs. safety sleeves, set of 25 pcs. injection-needles


REF 11130501




 needle clamping device

REF 05947800




 needle changer


REF 05905300



 safety sleeve

REF 05916000



 100 pcs. intrasosseous injection-needle

REF 06091900

Service Oil F1



W&H Service Oil F1 is a synthetic oil of maximum purity, which has been specially developed for maintenance of W&H turbine handpieces, straight and contra-angle handpieces, surgical instruments, air scalers and air motors.

- > Longer life for your instruments
- > High material compatibility
- > Sterilization resistant
- > Enormously economical

Service Oil F1




oil spray can,
package of 6 cans

MD-400 (400 ml, 6 pcs)


REF 10940021

Spray caps with nozzles




for contra-angle and straight handpieces with Roto Quick connection

REF 02038200




for W&H turbine handpieces, air motors and air scalars with Roto Quick connection

REF 02229200




for turbine handpieces and air motors with fix connection

REF 02036100




for products with Multiflex® connection

REF 04396100




for Alegra turbine handpieces with Sirona® connection

REF 05908000




for Alegra turbine handpieces with NSK Mach® connection

REF 05773300



for Alegra turbine handpieces with Bien Air Unifix® connection

REF 05772000



for Alegra turbine handpieces with NSK QD-J® connection

REF 05907800

Keep spray caps with nozzles for oil spray cans in stock. They can be re-used with every new can.

Keep spray caps with nozzles for oil spray cans in stock. They can be re-used with every new can.

Notes

Notes

Perfecta 300 / 600



A wide variety of materials, top-level requirements, constantly changing prerequisites – the daily bread of dental technicians.
With Perfecta 300 / 600, you have a powerful laboratory device at your fingertips which can be used for a variety of purposes and which can bring your ideas and those of your customers effortlessly to life.

- > Time saving due to blow out function (Perfecta 600)
- > Ergonomic operation by means of the operating controls
- > All functions and operating conditions in sight
- > Automated modes
- > Wide speed range and torque:
 - 1,000 – 40,000 rpm / 5.5 Ncm (Perfecta 300)
 - 1,000 – 50,000 rpm / 7.8 Ncm (Perfecta 600)

Perfecta 300 can also be ordered as
»E-type« version:
Electric motor LA-3E with ISO coupling

Perfecta 300



complete with control unit (230 V or 115 V), mains cable, motor handpiece, handpiece holder and operating controls for table and knee control units

table control unit
LA-323 T (230 V)
REF 14933000
LA-315 T (115 V)
REF 14933001

knee control unit
LA-323 K (230 V)
REF 14933100
LA-315 K (115 V)
REF 14933101

foot control unit
LA-323 F (230 V)
REF 14933200
LA-315 F (115 V)
REF 14933201

»E-type« table control unit with E-motor
LA-323 TE (230 V)
REF 14933002
LA-315 TE (115 V)
REF 14933003

»E-type« knee control unit with E-motor
LA-323 KE (230 V)
REF 14933102
LA-315 KE (115 V)
REF 14933103

»E-type« foot control unit with E-motor
LA-323 FE (230 V)
REF 14933202
LA-315 FE (115 V)
REF 14933203

Perfecta 600



complete with control unit (230 V or 115 V), mains cable, motor handpiece, handpiece holder and operating controls for table and knee control units

table control unit
LA-623 T (230 V)
REF 14936000
LA-615 T (115 V)
REF 14936001

foot control unit
LA-623 F (230 V)
REF 14936200
LA-615 F (115 V)
REF 14936201

knee control unit
LA-623 K (230 V)
REF 14936100
LA-615 K (115 V)
REF 14936101

Accessories for Perfecta 300 / 600



operating controls

LA-3 D for Perfecta 300
REF 05127000



motor handpiece without cable

LA-66
REF 05201200



motor »E-type« without cable

LA-3 E (only for Perfecta 300)
REF 05138800



operating controls

LA-6 D for Perfecta 600
REF 05243200

motor cable 1.8 m

for Perfecta 300
REF 05114900
for Perfecta 600
REF 05116500

Perfecta 900



At W&H, people have priority.

Therefore, when developing the Perfecta range, particular value was placed on ease of handling and the ergonomically innovative design. Unlike the traditional laboratory turbine, Perfecta 900 is perfectly suited to processing all materials right up to zirconium oxide and other high performance ceramics, owing to its optimized speed and high-speed handpiece.

- > Powerful high-speed handpiece with 100,000 rpm
- > Less heating of the material and longer tool operating life due to optimized speed
- > Improved sealing system and sealing air
- > Time saving due to blow out function
- > Ergonomic operation by means of the operating controls
- > Automated modes

Perfecta 900 can be retrofitted with the motor handpiece LA-66.

Perfecta 900



complete with control unit (230 V or 115 V), operating controls, mains cable, high-speed handpiece, handpiece holder, hose for air supply, hose for coolant supply (only for types with external coolant supplying)

table control unit
with internal coolant supplying
LA-923 TT (230 V)
REF 14939300
LA-915 TT (115 V)
REF 14939301

knee control unit
with internal coolant supplying
LA-923 KT (230 V)
REF 14939400
LA-915 KT (115 V)
REF 14939401

table control unit
with external coolant supplying
LA-923 T (230 V)
REF 14939000
LA-915 T (115 V)
REF 14939001


knee control unit
with external coolant supplying
LA-923 K (230 V)
REF 14939100
LA-915 K (115 V)
REF 14939101

Accessories for Perfecta 900



operating controls

LA-9 D
REF 05243400



milling device adaptor
to attach the high-speed handpiece
LA-9 to milling devices with 16 or
18 mm diameter

LA-9
REF 06319400



motor handpiece without cable

LA-66
REF 05201200

motor cable 1.8 m
for motor handpiece LA-66

REF 05116500



high-speed handpiece

LA-9
REF 05015900

motor cable 1.8 m
for high-speed handpiece LA-9

REF 05117800

Accessories for Perfecta 300 / 600 / 900



foot-operated starter

L-NV
REF 05038100



handpiece holder

REF 03211500



wall bracket for operating controls

REF 05138000

Accessory for »E-type« versions of Perfecta 300, MF-Tectorque, MF-Perfecta

Notes



1:1, technical handpiece for easy
technical working, maintenance-free,
twist tension chuck system,
only for handpiece burs

945
REF 14124500

Branch office**W&H Impex Inc.**

14300 Henn Rd.

Dearborn, MI 48126, **USA****t + 1 800 265 6277, + 1 519 944 6739****f + 1 519 974 6121****office.us@wh.com****wh.com/na****Main office****W&H Impex Inc.**

6490 Hawthorne Drive

Windsor, Ontario, N8T 1J9, **Canada****t + 1 800 265 6277, + 1 519 944 6739****f + 1 519 974 6121****office.ca@wh.com****wh.com/na****Manufacturer****W&H Dentalwerk Bürmoos GmbH**

Ignaz-Glaser-Straße 53, Postfach 1

5111 Bürmoos, **Austria****t +43 6274 6236-0****f +43 6274 6236-55****office@wh.com****wh.com**